


RadioButtons

Problem: When I run my program, a radiobutton is already checked.

When the form loads it sets the active element to the lowest tab index. Therefore, if a radiobutton has a TabIndex of 0, it will appear as checked when the form is run. TabIndex can be found in the Properties menu, under the Behavior category.

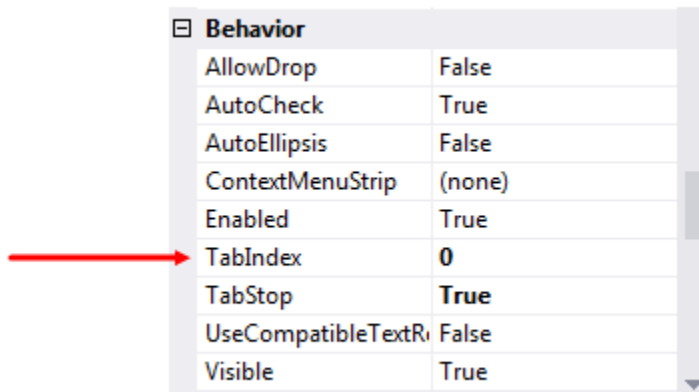

Behavior	
AllowDrop	False
AutoCheck	True
AutoEllipsis	False
ContextMenuStrip	(none)
Enabled	True
TabIndex	0
TabStop	True
UseCompatibleTextR	False
Visible	True

Solution: change the TabIndex of your Reset button to 0.